




# AppleColor™ RGB Monitor Owner's Guide

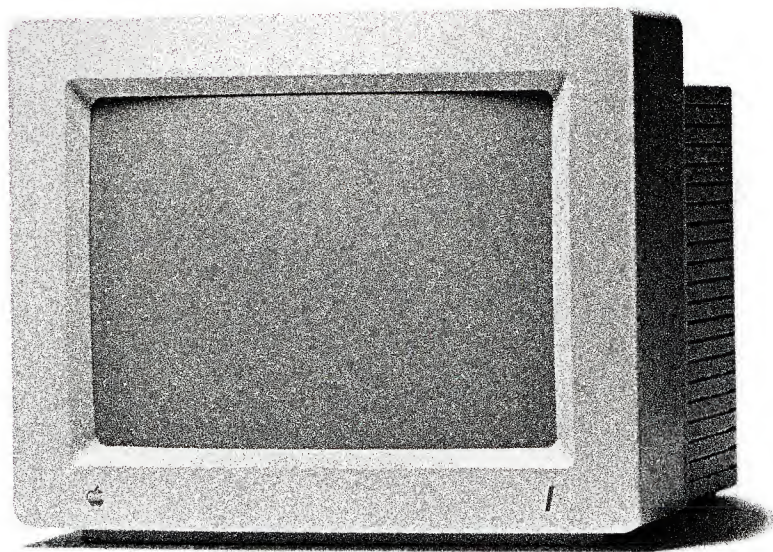

For the Apple IIgs®

## **LIMITED WARRANTY ON MEDIA AND REPLACEMENT**

If you discover physical defects in the manuals distributed with an Apple product or in the media on which a software product is distributed, Apple will replace the media or manuals at no charge to you, provided you return the item to be replaced with proof of purchase to Apple or an authorized Apple dealer during the 90-day period after you purchased the software. In addition, Apple will replace damaged software media and manuals for as long as the software product is included in Apple's Media Exchange Program. While not an upgrade or update method, this program offers additional protection for up to two years or more from the date of your original purchase. See your authorized Apple dealer for program coverage and details. In some countries the replacement period may be different; check with your authorized Apple dealer.

**ALL IMPLIED WARRANTIES ON THE MEDIA AND MANUALS, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO NINETY (90) DAYS FROM THE DATE OF THE ORIGINAL RETAIL PURCHASE OF THIS PRODUCT.**

Even though Apple has tested the software and reviewed the documentation, **APPLE MAKES NO WARRANTY OR REPRESENTATION, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO SOFTWARE, ITS QUALITY, PERFORMANCE, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. AS A RESULT, THIS SOFTWARE IS SOLD "AS IS," AND YOU THE PURCHASER ARE ASSUMING THE ENTIRE RISK AS TO ITS QUALITY AND PERFORMANCE.**

**IN NO EVENT WILL APPLE BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY DEFECT IN THE SOFTWARE OR ITS DOCUMENTATION,** even if advised of the possibility of such damages. In particular, Apple shall have no liability for any programs or data stored in or used with Apple products, including the costs of recovering such programs or data.

**THE WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHERS, ORAL OR WRITTEN, EXPRESS OR IMPLIED.** No Apple dealer, agent, or employee is authorized to make any modification, extension, or addition to this warranty.

Some states do not allow the exclusion or limitation of implied warranties or liability for incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.


## **WARNING**

This equipment has been certified to comply with the limits for a Class B computing device, pursuant to Subpart J of Part 15 of FCC Rules. See instructions if interference to radio or television reception is suspected.



Apple®

# AppleColor™ RGB Monitor Owner's Guide

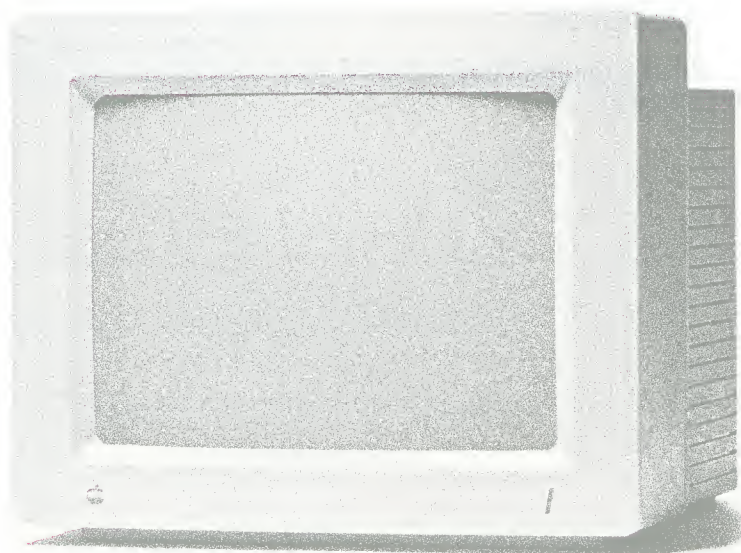

 APPLE COMPUTER, INC.

© Copyright 1986, Apple Computer, Inc., for all nontextual material, graphics, figures, photographs, and all computer program listings or code in any form, including object and source code. All rights reserved.

Apple and the Apple logo are registered trademarks of Apple Computer, Inc.

LaserWriter is a trademark of Apple Computer, Inc.

AppleColor is a trademark of Apple Computer, Inc.

AppleCare is a registered service mark of Apple Computer, Inc.

Macintosh is a trademark of McIntosh Laboratories, Inc., and is being used with express permission of its owner.

ITC Garamond, ITC Avant Garde Gothic, and ITC Zapf Dingbats are registered trademarks of International Typeface Corporation.

Microsoft is a registered trademark of Microsoft Corporation.

POSTSCRIPT is a trademark of Adobe Systems Incorporated.

Printed in Japan.



**Radio and television interference iv**

**AppleColor™ RGB Monitor Owner's Guide 1**

Getting started 2

Setting up your system 2

Connecting the AppleColor RGB Monitor 3

Turning the monitor on 5

Adjusting the monitor 6

Changing the viewing angle 8

Using and caring for your monitor 9

Working tips 9

Things to avoid 9

Protecting your monitor from theft 10

Cleaning the monitor 10

Service and support 11

Appendix: AppleColor RGB Monitor specifications 12



---

---

## Radio and television interference

The equipment described in this manual generates and uses radio-frequency energy. If it is not installed and used properly—that is, in strict accordance with Apple's instructions—it may cause interference with radio and television reception.

This equipment has been tested and complies with the limits for a Class B computing device in accordance with the specifications in Subpart J, Part 15, of FCC rules. These rules are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that the interference will not occur in a particular installation, especially if a “rabbit-ear” television antenna is used. (A rabbit-ear antenna is the telescoping-rod type usually found on television receivers.)

You can determine whether your computer is causing interference by turning it off. If the interference stops, it was probably caused by the computer or its peripheral devices. To further isolate the problem, disconnect the peripheral devices and their input/output (I/O) cables one at a time. If the interference stops, it was caused by either the peripheral device or the I/O cable. These devices usually require shielded I/O cables. For Apple peripheral devices, you can obtain the proper **shielded cable** from your authorized Apple dealer. For non-Apple peripheral devices, contact the manufacturer or dealer for assistance.

A **shielded cable** uses a metallic wrap around the wires to reduce the potential effects of radio-frequency interference.

---

|                  |   |
|------------------|---|
| <b>Important</b> | This product was FCC-certified under test conditions that included use of shielded cables and connectors between system components. It is important that you use shielded cables and connectors to reduce the possibility of causing interference to radio, television, and other electronic devices. |
|------------------|---|

---

If your computer does cause interference to radio or television reception, you can try to correct the interference by using one or more of the following measures:

- Turn the television or radio antenna until the interference stops.
- Move the computer to one side or the other of the television or radio.
- Move the computer farther away from the television or radio.
- Plug the computer into an outlet that is on a different circuit than the television or radio. (That is, make certain the computer and the radio or television set are on circuits controlled by different circuit breakers or fuses.)
- Consider installing a rooftop television antenna with a coaxial cable lead-in between the antenna and television.

If necessary, consult your authorized Apple dealer or an experienced radio/television technician for additional suggestions.



# AppleColor™ RGB Monitor Owner's Guide

The AppleColor™ RGB Monitor is the ideal companion for your Apple computer in both design and usability. Among its features are:

- a high-contrast screen
- graphics capability
- high-quality display in either 40-column or 80-column widths
- full RGB color capability
- simultaneous display of color graphics and text
- an easy-to-clean screen and cabinet

*RGB* stands for *Red Green Blue*, the three primary colors that your monitor uses to create color images on the screen.

The AppleColor RGB Monitor is easy to set up and adapt to your working habits and environment. You can change the brightness and contrast of the display to suit your preferences. You can also adjust the viewing angle with the built-in Height-Adjustment bar.

To get the best results from your monitor, take a few minutes to read this manual. Follow the instructions carefully.

---

---

## Getting started

Here's an overview of the topics you'll find in this manual:

- setting up your system
- connecting the monitor to your Apple computer and to a power outlet
- turning the monitor on
- adjusting the monitor
- changing the viewing angle

You'll also find some tips on using and caring for the monitor, notes on service and support, and an appendix that provides technical specifications for the AppleColor RGB Monitor.

---

---

## Setting up your system

When considering where to put your Apple computer system, keep in mind that the AppleColor RGB Monitor requires its own power source. It does not receive any power from the computer. This means that you need at least two electrical outlets near your system—three if you have a printer. Many people prefer to plug their computer equipment into a single power strip equipped with a surge protector. The single strip is convenient, and the surge protector keeps your equipment from being damaged by sudden increases in voltage. See your authorized Apple dealer for more information.

---

**Important** Never plug your computer into a wall socket that you can turn off with a wall switch. Someone may switch off the lights and with them the computer—you could lose any data not saved on disk.

---

Choose a sturdy desk or table to work on. Don't set up your Apple computer system on a card table or other surface that could be tipped or knocked over easily.



---

---

## Connecting the AppleColor RGB Monitor

Before you connect the AppleColor RGB Monitor, make sure that your Apple computer is turned off and that you have


- your AppleColor RGB Monitor
- a video cable
- a power cord (separate for 220/240-volt systems)

### Important

This product was FCC-certified under test conditions that included use of **shielded cables** and connectors between system components. It is important that you use shielded cables and connectors to reduce the possibility of causing interference to radio, television, and other electronic devices.

---

A **shielded cable** has a metallic wrap around the wires to reduce the potential effects of radio-frequency interference.

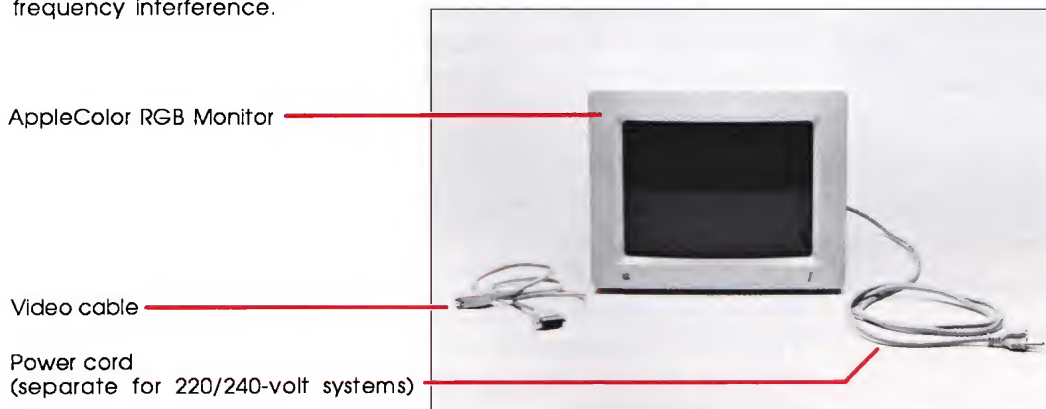

**Figure 1**

Follow these steps to connect the monitor to its power source and to your Apple computer:

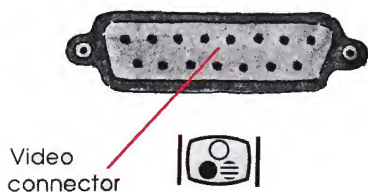


Figure 2

2. Connect one end of the video cable to the monitor's video connector. It's on the left side of the back panel, marked with an icon. (See Figure 2.) Both ends of the video cable are the same, so it doesn't matter which end you connect.
3. Connect the other end of the cable to the computer's RGB Monitor connector. (See Figure 3.) Some models of Apple computers have the same video RGB monitor icon on the back panel. If yours does not and you can't find the RGB Monitor connector, see your owner's manual.
4. Plug the monitor power cord into a grounded outlet.

### Warning

This equipment is intended to be electrically grounded. Your AppleColor RGB Monitor is equipped with a three-wire grounding plug—a plug that has a third (grounding) pin. This plug will fit only a grounding-type AC outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact a licensed electrician to replace the outlet with a properly grounded outlet. Do not defeat the purpose of the grounding plug!

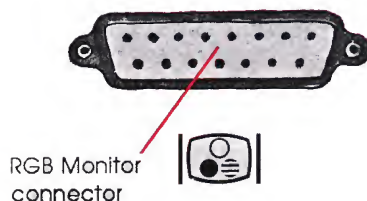


Figure 3

- ❖ *By the way:* 220/240-volt models of the AppleColor RGB Monitor come with detachable power cords. If you have a 220/240-volt model, first plug the connector end of the cord into the power input unit. It's on the left side of the back panel, marked with the power icon. Then plug the other end into a three-pronged, grounded outlet.


Now you're ready to start the computer and adjust the monitor. If you have not plugged the computer's power cord into the computer, or if you have any peripheral devices to plug in, now is a good time to do so.

---

---

## Turning the monitor on

To turn your monitor on or off, just press the On-Off button on the right side of the monitor. When you turn on the monitor, you should see the green power indicator light come on. It's on the front of the monitor, in the lower-right corner. If the light does not come on, press the On-Off button again. (See Figure 4.)

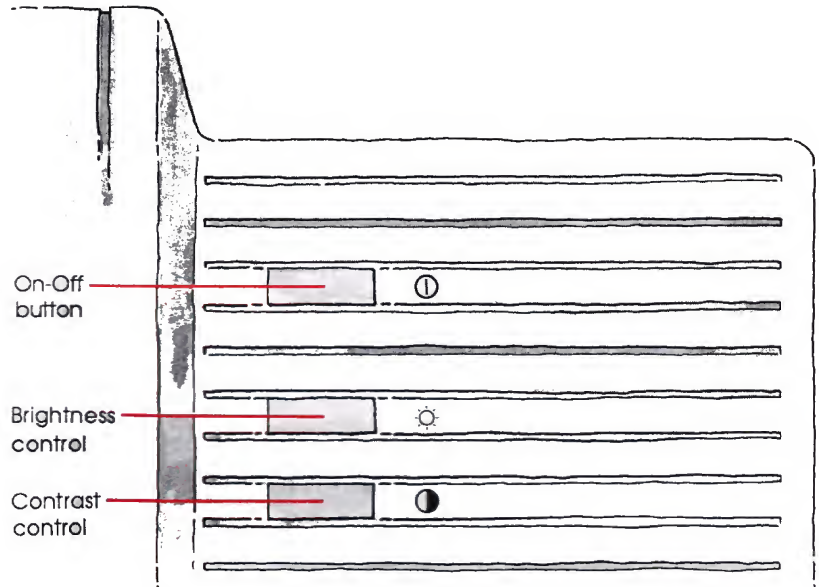

**Figure 4**

❖ *Note:* If the indicator light still does not come on, check to see if the power cable is plugged in properly. If it is, find out if power to the socket has been interrupted. You can test the socket by plugging something else into it—like a desk lamp or a radio. If the test appliance works but the monitor does not, contact your authorized Apple dealer.

---


---

## Adjusting the monitor

To adjust the monitor, you need to get something on the screen. You can use any startup disk that came with your computer, but preferably one that uses color. (See your owner's manual if you don't know how to insert a disk into the drive or how to start a program.)

1. Insert the disk into the startup disk drive.
2. Turn the computer on. The Power light and the Disk Use light come on, and the disk drive whirs. In a few moments, some text should appear on the screen. At this point, you can make any of five adjustments to fine-tune the display.

Three controls—Horizontal Hold, Vertical Hold, and Vertical Size—are on the back panel of the monitor. (See Figure 5.) An icon identifies each control.

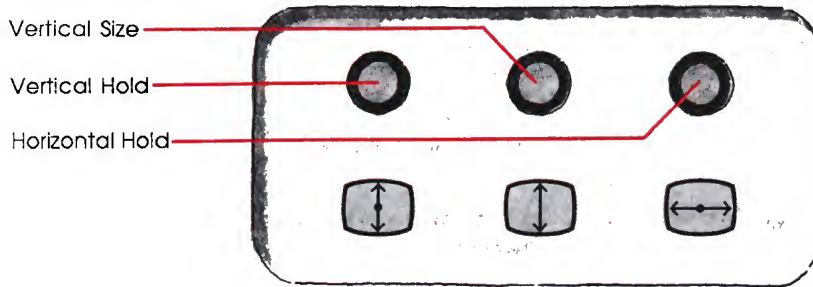

**Figure 5**

3. If the display is moving vertically, turn the Vertical Hold control until the picture becomes stable.

4. If the display is moving horizontally, turn the Horizontal Hold control until the picture becomes stable.
5. If the display looks stretched so that characters on the top and bottom lines are partially obscured, or if the characters look squashed, turn the Vertical Size control until you have lengthened or shortened the display the desired degree. The recommended setting for Vertical Size is the point at which black areas at the top and bottom of the display just disappear when the screen is displaying graphics information with a colored border.
6. Find the Brightness control on the right side of the monitor. It's between the On-Off button and the Contrast control. (See Figure 4.) To achieve a good balance between screen and character brightness, rotate the Brightness control toward the rear of the monitor to increase brightness; rotate it toward the front to decrease brightness. As you adjust the brightness, you will feel the factory-calibrated detent (or balance) position marking the center of the range on the Brightness control. Use this setting for the best balance between light and dark on your display.
7. Find the Contrast control on the right side of the monitor. It's just below the Brightness control. (See Figure 4.) Rotate the Contrast control toward the rear of the monitor to increase contrast. Rotate it toward the front to decrease contrast. Set the contrast to a comfortable level.

❖ *Note:* If you can't solve a problem with the monitor controls, take the monitor to your authorized Apple dealer.

Go ahead and position the computer and monitor as you prefer for your work. Some models of Apple computers are large enough to let you place the AppleColor RGB Monitor directly on top of the computer's case. Try it and see if you like it there. If not, you can place the monitor to the side.



---


---

## Changing the viewing angle

After setting up your monitor, if you find the viewing angle too low, you can raise it by using the Height-Adjustment bar on the bottom of the monitor. The Height-Adjustment bar raises the front of the monitor one inch off the computer or desk surface.

Follow these steps to raise the viewing angle:

1. Gently turn the monitor on its side.
2. Locate the Height-Adjustment bar. It's the bar about ten inches long and an inch wide that's positioned parallel to the bottom-front edge of the monitor. (See Figure 6.)

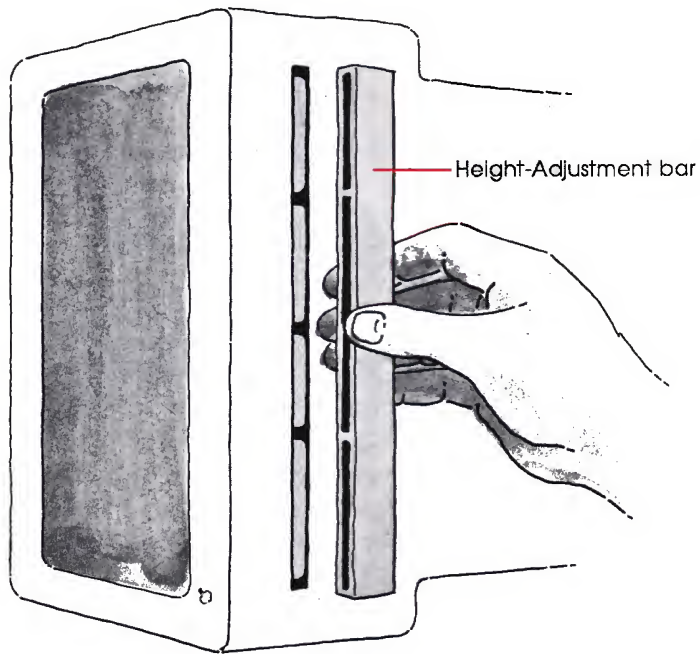

**Figure 6**

3. Pull the bar off the bottom of the monitor and turn it so that the slots on the flat side of the bar face toward the back of the monitor and the slots on the edge of the bar line up with the plastic guides on the bottom of the monitor.
4. Push the bar onto the plastic guides.
5. Gently return the monitor to its upright position.

---

---

## Using and caring for your monitor

This section gives you some guidelines on how to use your monitor efficiently and how to care for it.

---

### Working tips

Here are some tips you should keep in mind when using your AppleColor RGB Monitor:

- The computer and monitor are not made of cast iron, but they aren't made of antique porcelain, either. Use common sense when handling parts of the system. Gentle and firm will do the job.
- When you switch between 40-column and 80-column text formats, you may need to adjust the contrast for better visibility.
- An active monitor generates signals that can interfere with a disk drive's ability to read a disk. If your system seems to have trouble reading disks, move the disk drive (or drives) away from the monitor.
- If possible, try to position the monitor away from sources of glare, like windows or bright lights.
- Staring at anything for a long time can cause eyestrain. Make it a rule to focus on a distant object occasionally to relax your eye muscles.

---

### Things to avoid

Here is a list of some things that could damage your monitor. Some of them are obvious, some not.

- Don't leave your Apple computer system exposed to direct sunlight. The heat can damage the case and even the electronics.
- Don't set cups, glasses, or any vessel containing liquids on or beside the computer, monitor, or peripheral devices. Spilling a liquid into any electronic instrument is a sure way to damage the circuitry.

- Don't place objects—books, magazines, papers, hats, clothing, and so on—on top of the computer or monitor. Such objects can block the cooling vents. The extra weight of objects may also tip over the monitor. Naturally, do not lean on any element of your computer system.
- Don't leave the monitor on after you turn off the computer. This is more a matter of electrical safety and common sense than anything else.
- ❖ *By the way:* Your monitor probably feels warm to the touch when it's on. Like a television set, the electronics and picture tube give off a certain amount of heat, so warmth is not usually a cause for alarm.

---

## Protecting your monitor from theft

The small rectangular opening in the bottom-right corner on the back of the monitor is for connecting a security lock. It lets you attach a narrow, flexible cable that you can use to secure your monitor (and the rest of your Apple computer system, too) to prevent theft. (See Figure 7.) Security locks are available from your authorized Apple dealer.

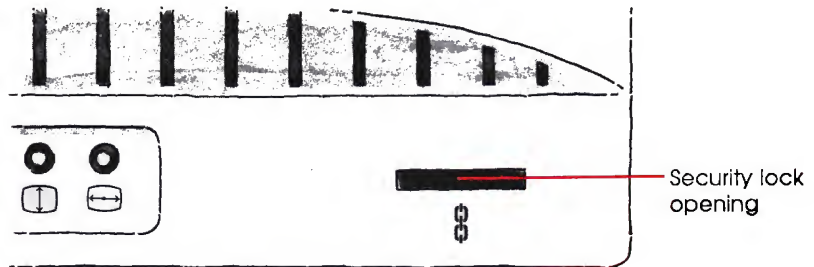


Figure 7

---

## Cleaning the monitor

Follow these suggestions if you need to clean your monitor:

- Clean the cabinet with a *damp* (not wet) lint-free cloth.
- Don't use aerosol sprays, solvents, or abrasives that might damage the cabinet finish.

- If the screen gets dirty, apply a household glass cleaner to a clean cloth or paper towel and wipe the screen. Don't spray glass cleaner directly onto the screen. It could run down inside the case and damage electrical circuits.

---

---

## Service and support

To help you get the best performance from your system, Apple Computer, Inc. has established a worldwide network of full-support authorized Apple dealers. If you need answers to technical questions or information about product updates, your authorized Apple dealer can help you. Apple's Technical Support organization backs each dealership and international technical support group via AppleLink™, a state-of-the-art on-line electronic information service, to ensure prompt, reliable assistance.

Your dealer has the latest information on new hardware and software products as well as product updates. If you wish to upgrade your system, your dealer can help you select compatible components.

If your product requires service, your local authorized Apple dealer is trained and ready to support you. Apple provides factory-quality parts and the latest available diagnostic equipment to the more than three thousand authorized Apple service centers throughout the world. Apple guarantees parts and warranty labor. (Regulations in each country determine the length of warranty. Some restrictions may apply, depending on the country of original purchase.)

If for some reason you cannot return to the authorized dealer from whom you purchased your system, go to the nearest service location. For the location nearest you, in the United States, call (800) 538-9696; in Canada, call (800) 268-7796 or (800) 268-7637. For locations in other countries, either call the Apple headquarters in your country or write to

Apple Computer, Inc.  
Attn: Customer Relations  
20525 Mariani Avenue  
Cupertino, CA 95014  
USA

Apple also offers service options designed to meet your needs. They range from carry-in contracts like the AppleCare® Service Agreement (U.S., Canada, and Australia only), which extends full warranty coverage up to three years, to self-service plans designed to allow large installations to repair their own equipment. Whether you use your computer at home, in the office, or at school, Apple has a low-cost service plan for you. For details, please visit your authorized Apple dealer.

---



---

## Appendix: AppleColor RGB Monitor specifications

|                                  |  |                       |
|----------------------------------|--|-----------------------|
| <b>Picture tube</b>              | 12-inch diagonal (11.5-inch viewable)<br>.37 mm tri-dot-pitch high-contrast (black matrix)   |                       |
| <b>Input signals</b>             | Red, green, blue video signals composited with negative going sync $1.0 \pm .5$ volts peak to peak, internally terminated with 75 ohm resistors. Composite sync negative going $4.0 \pm 1.0$ volts peak to peak, internally terminated with 2000 ohm resistor. |                       |
| <b>User controls</b>             | Power switch (right side)<br>Contrast (right side)<br>Brightness, with detent reference (right side)<br>Vertical Size (back panel)<br>Vertical Hold (back panel)<br>Horizontal Hold (back panel)   |                       |
| <b>Scanning frequencies</b>      |  |                       |
|                                  | <b>NTSC/60</b>   | <b>NTSC/50-PAL/50</b> |
| Horizontal                       | 15.734 kHz   | 15.659 kHz            |
| Vertical                         | 60 Hz  | 50 Hz                 |
| <b>Video bandwidth</b>           | Flat within 1.5 DB to 6.5 MHz. Less than 3 DB down at 8 MHz.   |                       |
| <b>Resolution</b>                | 640 H by 200 V pixels when used with the Apple IIGs  |                       |
| <b>Active video display area</b> | Adjusted at the factory to produce an active video area of 200 mm horizontal by 150 mm vertical. Remainder of display surface area is used for border display zone.  |                       |
| <b>Weight</b>                    | 12.5 kg (27.56 lb) maximum   |                       |
| <b>Power requirements</b>        | Less than 65 watts under normal viewing conditions. 90 watts maximum.  |                       |



**Input voltage**

| <b>Model</b> | <b>Operating range</b> | <b>Power frequency</b> |
|--------------|------------------------|------------------------|
| 120 v        | 108–132                | 50–60 Hz               |
| 220 v        | 198–242                | 50–60 Hz               |
| 240 v        | 216–264                | 50–60 Hz               |

**Operating ambient temperature** 10°C to 40°C  
(50°F to 104°F)

**Operating humidity** 90% maximum

**Operating altitude** 10,000 feet maximum

**Fuse protection** The monitor contains internal power line fuse protection. This fuse should be replaced with the same type by a qualified service technician.

**Input signal connector pin assignments**

| <b>Pin</b> | <b>Function</b>       |
|------------|-----------------------|
| 1          | Red video ground      |
| 2          | Red composite video   |
| 3          | Composite sync        |
| 4          | (not used)            |
| 5          | Green composite video |
| 6          | Green video ground    |
| 7          | (not used)            |
| 8          | (not used)            |
| 9          | Blue composite video  |
| 10         | (not used)            |
| 11         | (not used)            |
| 12         | (not used)            |
| 13         | Blue video ground     |
| 14         | (not used)            |
| 15         | (not used)            |
| Shell      | Shield ground         |

This Apple manual was written, edited, and composed on a desktop publishing system using the Apple Macintosh™ Plus and Microsoft® Word. Proof and final pages were created on the Apple LaserWriter™ Plus. POSTSCRIPT™, the LaserWriter's page-description language, was developed by Adobe Systems Incorporated.

Text type is ITC Garamond® (a downloadable font distributed by Adobe Systems). Display type is ITC Avant Garde Gothic®. Bullets are ITC Zapf Dingbats®. Program listings are set in Apple Courier, a monospaced font.



# Apple<sup>®</sup> II    AppleColor<sup>™</sup> RGB Monitor

## Packing List

This package contains the following items:

|   |   |                      |
|---|---|----------------------|
| 1 | Apple Color RGB Monitor   | 699-0400             |
| 1 | Manual: <i>AppleColor RGB Monitor Owner's Guide</i><br>with Tell Apple Card | 030-3106<br>030-3107 |
| 1 | RGB Color Monitor Cable   | 590-0536             |
| 1 | Warranty Card   | 030-0967             |

If you have a question, please contact your authorized Apple dealer.



Return Address: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Place  
First Class  
Postage  
Here

Apple Computer, Inc.  
P.O. Box 1143  
Cupertino, CA 95014  
USA

 Monitor

---





**Apple Computer, Inc.**  
20525 Mariani Avenue  
Cupertino, CA 95014  
408 996-1010  
TLX 171-576

030-3106-B  
Printed in Japan